

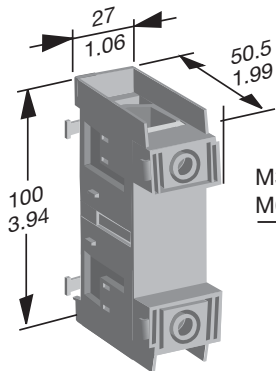
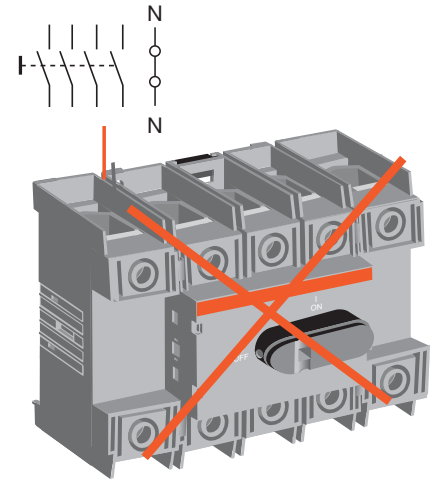
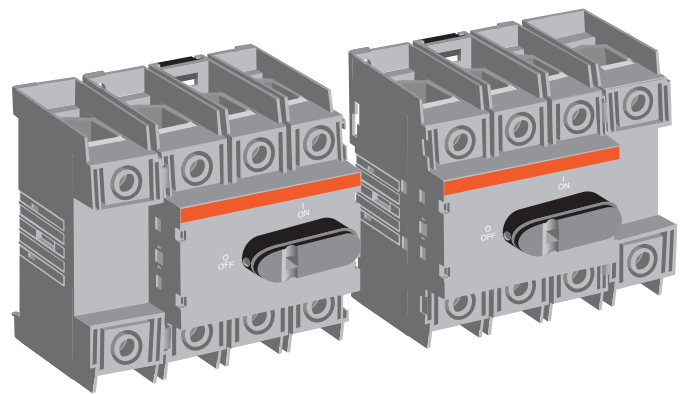
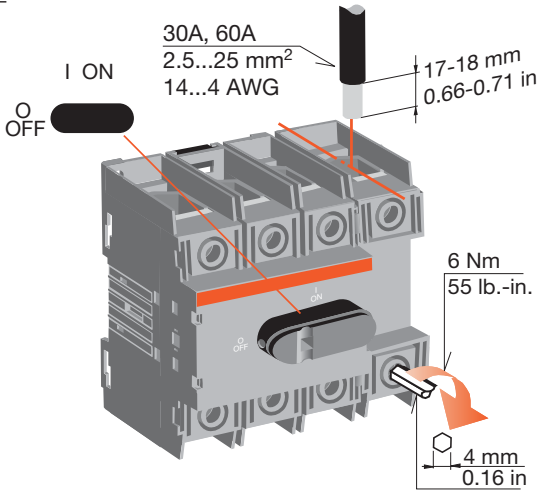
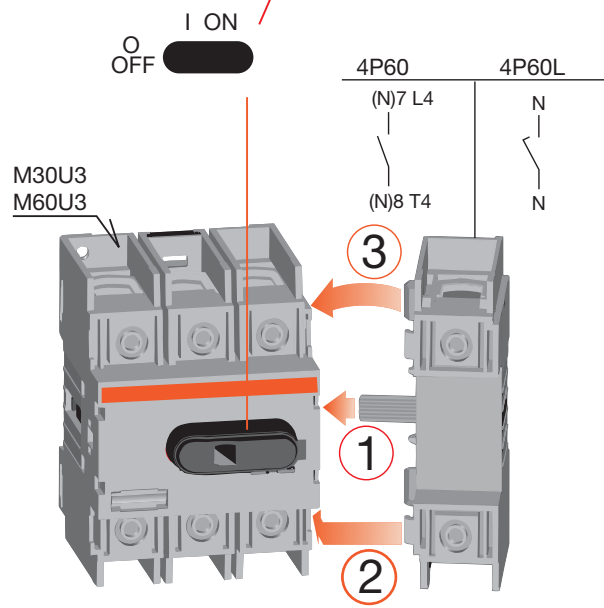


4P60x, NP60x

Document no. 344P60-A

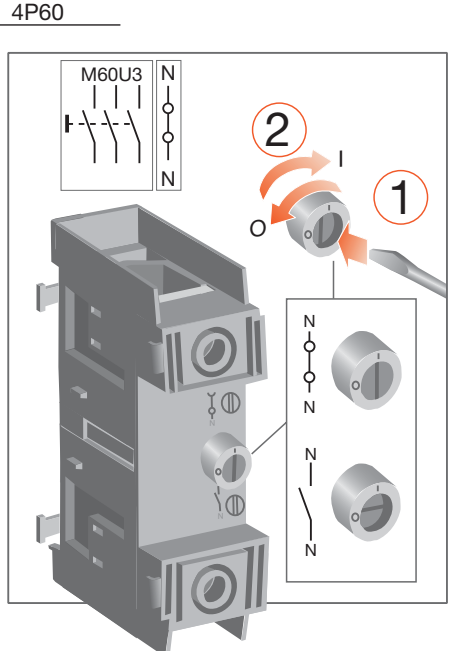

UL US
IND. CONT.
EQ 97C2
General Use Ratings
600 VAC 100 A
Listed for use with
M30U3, M60U3

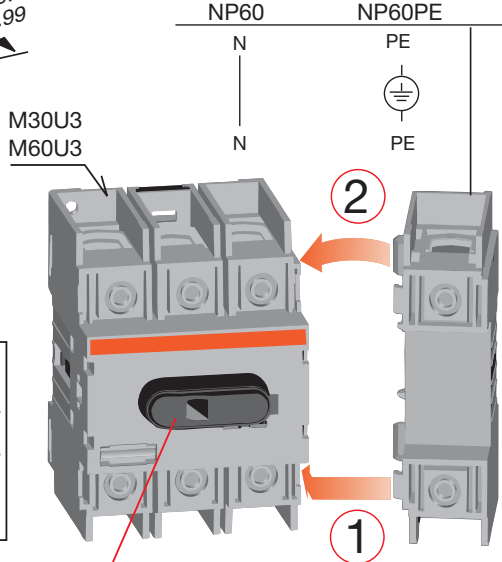

4P60xDM, NP60xDM

