


24389

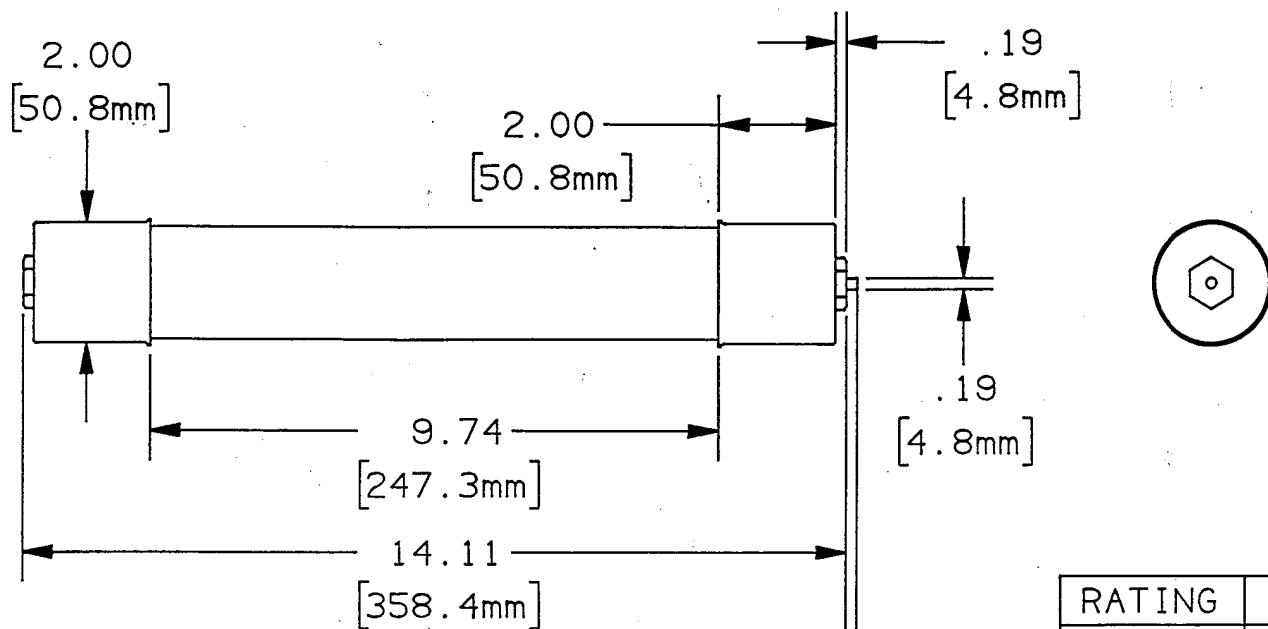

SURFACE "A"

INDICATOR FLUSH WITH SURFACE "A" BEFORE FUSE OPENS.
 INDICATOR EXTENDS .19in(4.8mm) AFTER FUSE OPENS.
 INDICATOR EXERTS 1 LB FORCE AT END OF TRAVEL

RATING	CATALOG NO.
5E	A055F1C0R0-5E
7E	A055F1C0R0-7E
10E	A055F1C0R0-10E
15E	A055F1C0R0-15E
20E	A055F1C0R0-20E
25E	A055F1C0R0-25E
30E	A055F1C0R0-30E
40E	A055F1C0R0-40E
50E	A055F1C0R0-50E
65E	A055F1C0R0-65E

GOULD 374 MERRIMAC STREET
 NEWBURYPORT, MA 01950

PRODUCT MANAGER

DESIGN ENGINEER

SIGN: *A. C. Cline*
 DATE: 5/18/93

SIGN: *L. O. Shill*
 DATE: 1/29/93

MEDIUM VOLTAGE AMP-TRAP
 E-RATED GENERAL PURPOSE
 CURRENT LIMITING FUSE
 CS-3 SERIES, 5E TO 65E, 5.5KV MAX

OUTLINE DIMENSIONS
 NOT TO BE USED FOR PRODUCTION

24389